

## IRWB1-2456

### IR hand-wash basin

#### Set consists of:

- stainless steel washbasin with integrated electronic module
- PVC syphon
- chromium outlet with flow regulator for premixed water
- 1 flexible water connection pipe 3/8"
- 6V EM valve with filter
- Adapter 230V/9V DC - mains version or 9V alkaline battery - battery version
- mounting brackets, screws and plugs



#### Technical specifications EP 2456B:

Operating voltage: 9V alkaline battery  
Battery life: 100.000 uses (approx. 2 years)

#### Technical specifications EP 2456:


Power supply: 230V / 50Hz  
Operating voltage: 9V DC



#### Further technical specifications:

EM valve: 6V DC bistable  
Active range: 15 cm (adjustable)  
Flushing: water flows as long as user is in the active range  
Safety flushing stop: 60 secs. (adjustable)  
Flow pressure: 0,5 - 6 bars  
Static pressure: max. 8 bars  
Flow rate: 5 - 12 l/min.  
Water connection: 3/8"  
Check valve: integrated  
Dirt filter: integrated


#### LED indicator:

Diagnosis LED is placed in the front of the electronic, for easier definition of error in case of service. Red LED is blinking at a reflex from hand or body when present within the active range.

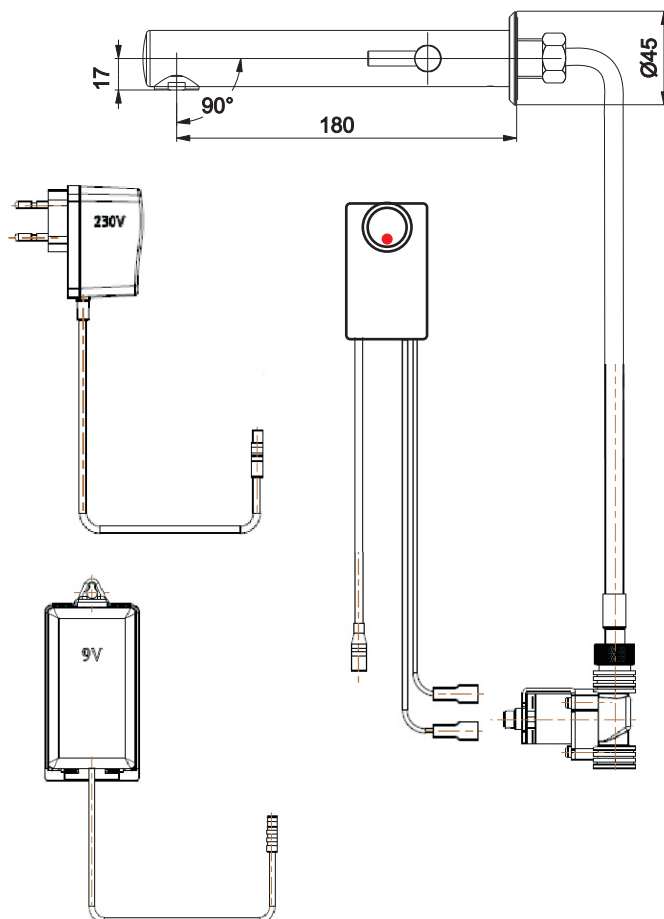

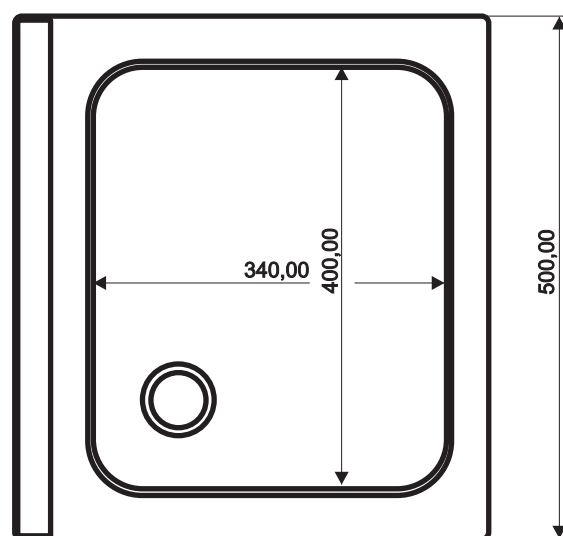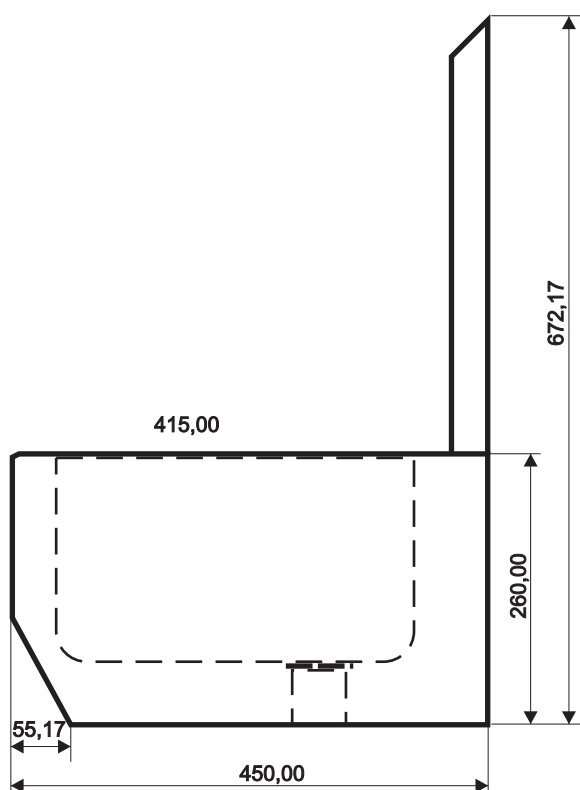

Dimintions in mm

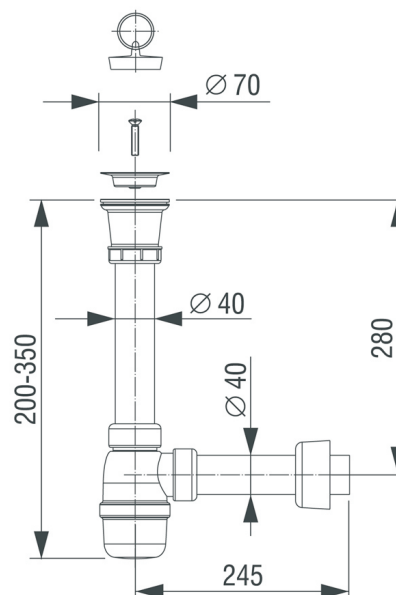

Dimintions in mm